



MINI MAX III - ELECTRIC



R.F. Hunter Co., Inc. has been designing, selling and servicing commercial quality filtrators for over 62 years. We offer a full range of models and sizes to accommodate 65 lb. to 165 lbs. and FOG units at 65 lbs. and 130 lbs. plus filters, Filtrator compound and replacement parts.

ITEM # _____

MODEL # MINI MAX III

Description

The MINI MAX III Filter has a reversible pump and motor which filters the oil as the oil is being removed from the fryer. The filter oil is pumped back to the fryer when the operator is ready. The MINI MAX III is completely self-contained cart, container and power unit housing and base are constructed of stainless steel. All other metal surfaces are nickel-plated steel. The hose is designed to handle high temperature edible oils being constructed with embedded wire reinforcements. The pump is specially machined to handle high temperature edible oils as well.

Electrical Specifications

110-115 VAC, ½ H.P., 8.8-7.4 AMP 60 HZ, 1.0 SF. Equipped with heavy-duty reversible switch, pump/motor, oil proof lead wire cord and 3 prong grounding plug. Thermal and torque overload protection is provided for the motor.

Standard Accessories

50 Filter Paper Envelopes (FE03)
25 Ind. Packets of Filter Powder (FP22D)
Container Cover, stainless steel.

Optional Accessories:

Extension Cord


R.F. HUNTER CO., INC. MINI MAX III ELECTRIC

ITEM # _____

RF HUNTER CO., INC.

MODEL#: MINI MAX III ELECTRIC

SPECIALISTS IN KITCHEN ECONOMY SINCE 1945

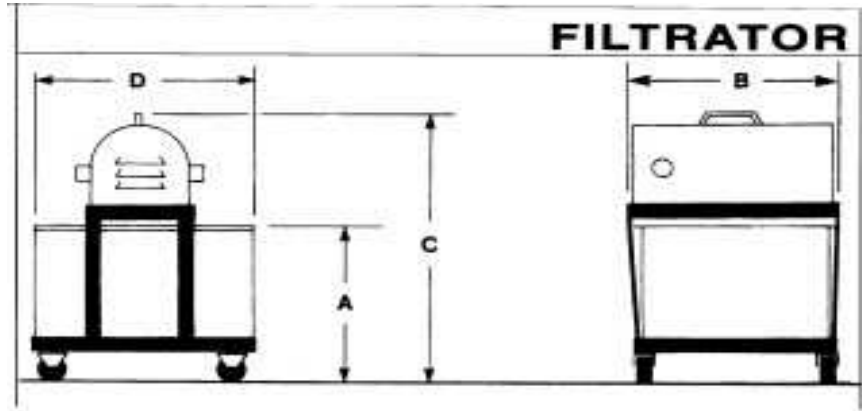

SPECIFICATIONS		
	US	METRIC
DIMENSION A	12.00"	30,48 cm
B	17.75"	45,09 cm
C	22.13"	56,20 cm
D	22.00"	55,88 cm
Filter Media	Cloth Bag or Paper Envelope	
Container Capacity	65 lbs.	29,5 litres
Shipping Weight	100 lbs	45,4 Kgs
Shipping Cube*	12.5 cu. Ft.	,35 cu. Meters
Electrical		
Volts	110-115	
Amps	8.8-7.4	
Phase	Single	
HZ	60	
Plug Configuration	12 VT 15A	

* If shipped common carrier. Shipment via UPS in two boxes of 2.6 cu. Ft. (.07 cu meters) and 6.2 cu. Ft. (.18 cu meters)

113 Crosby Road, Ste. #9, Dover NH 03820-4370
 Tel: (603) 742-9565 Fax: (603) 742-9608 (800) 332-9565
 Email: sales@rfhunter.com Visit our website at: www.rfhunter.com